

---

# TP85

## PRINTER

---



ETHERNET



USB



RS232

THERMAL PRINTER

Ethernet

USB

RS232

Multi OS compatible

---

[www.rmupos.co.uk](http://www.rmupos.co.uk)

# CONFIGURATIONS



TP85 B



TP85 W



TP85BT B



TP85BT W



TP85W B



TP85W W

## TP85

Print method	Thermal
Effective print width	72mm
Paper loading	automatic
Emulation	Esc / Pos

## SETTINGS

Technology	Thermic
Printing	Monochrome or bi colour (special paper)
Print speed	250mm/s 59 lines/s
Points	203DPI
Thermal printer paper	80mm 79.50 ± 0.50 (L)mm x dia 83.00 mm or 58mm 57.50 ± 0.50 (L)mm x dia 83.00mm
Print width	72mm - 48mm/54mm
Characters per line	42/21 Fonte A - 56/28 Fonte B
Font	95 Alphanumeric, 128*11 37 International, Graphic, Korean
Barcodes	UPC-A, UPC-E, EAN8, EAN13, Code 39, Code 93, Code 128, ITF, CODABAR, PDF417, QR Code
Cut type	Total or partial
Sensor	End-of-roll, cover open
Interfaces	USB type B, RS-232 type RJ45 network RJ45, cash-drawer RJ11 24V - 2 drawers opening compatible
PGM and graphic logo	256 Kb
Internal memory	64 Kb
OS :	Win10/Win7/POSReady 7/Linux CUPS/OPOS/ JavaPOS, SDK, ANDROID

## VARIOUS

Dimensions H x W x D	134.8 x 132 x 132mm
Weight	1.37 Kg
Colours	Black or White
Power supply	100~240AC (50~60Hz) 24VDC 2,5A
Settings	Horizontal, Vertical (Wall Mount Option)
Cables & Power supply	Mains supply, RS232 cable, USB cable
Print reducer	58mm
Certifications	CE FCC, class A, TUV/GS, CE, CB, cTUVus
Operating temperature	0°C ~ 50°C
Storage temperature	-20°C ~ 70°C
Operating humidity	5% ~ 90% (without paper)
Option	Kitchen alarm


## MODELS

Auto cutter	2,000,000 Cut
Printer head lifespan	150Km
Number of lines	70,000,000

## TP85

### TP85 Bluetooth

### TP85 WIFI

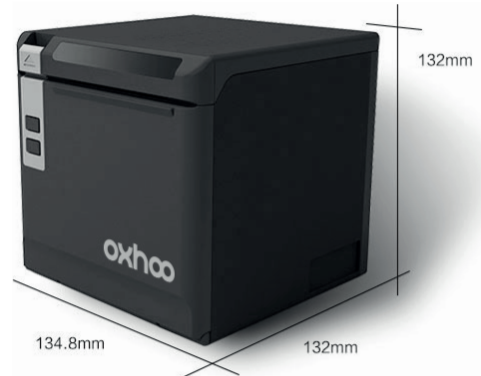

Specifications are subject to change without notice. © OXHO 2019