


TP90

DESIGN IN EVERY DETAIL

Discover our **TP90** thermal printer, a versatile design offering fast, silent printing. Compact and easy to use, it fits perfectly into any environment. Available in black or white.

I/O BOARD

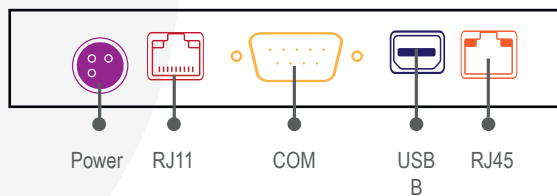

TECHNICAL SPECIFICATION

CONFIGURATION

Print method	Direct Thermal
Print width	72mm (576 points)
Paper loading	Top Loading, Automatic
Emulation	ESC/POS
Resolution	203 dpi

SETTINGS

Printing	Monochrome or Bi-colour
Control panel	LED
Print speed	250mm/s 59 lines/s
Paper roll	80mm 79.5 ± 0.5(L)mm x dia 83 mm or 58mm; 57.5 ± 0.5 (L)mm x dia 83mm
Paper Thickness	0.056~0.1 mm
Characters per lines	42/21 Font A - 56/28 Font B
Fonts	95 Alphanumeric, 37 International, 128*11 Graphic, Korean
Barcodes	UPC-A, UPC-E, EAN8, EAN13, Code 39, Code 93, Code 128, ITF, CODABAR, PDF417, QR Code
Cutter	Total or Partial
Sensor	End of roll, cover open
Interfaces	USB Type-B, RS-232, RJ45 Network, RJ11 Cash Drawer - 24V - 2 Drawer opening compatible
PGM & graphic logo	256Kb
Internal memory	64Kb
OS Compatibility	Win10, Linux CUPS, OPOS, JavaPOS, SDK, Android

SERVICE LIFE

Cut	2,000,000 Cuts
Print head	150km of paper
Number of lines	70,000,000

VARIOUS

Power supply	100~240AC (50~60Hz) 24VDC 2.5A
Settings	Horizontal, Vertical
Cable & power supply	Power supply, RS232 cable, USB cable
Operating Temperature	0°C ~ 50°C
Storage Temperature	-20°C ~ 70°C
Operating Humidity	5% ~ 90% (Without paper)
Options	External Buzzer

DIMENSIONS

H*W*D	165*130*120mm
-------	---------------

WEIGHT

Weight	1.28kg
--------	--------

COLOUR

Colour	Black or White
--------	----------------

CONTACT US

RMS

Unit 006 Ettrick Riverside, Dunsdale Road,

Selkirk TD7 5EB

Tel: 01750700527

enquiries@rmspos.co.uk - www.rmspos.co.uk

