


XP-200B

Thermal Barcode Printer

Xprinter®

XP-200B

Thermal Barcode Printer



Application



Retail Store



Restaurant



Label paper

Receipt paper



- Support both **receipt printing** and **label printing**



- Adjustable printing paper width(**20~60mm**)




- Paper roll diameter: **80mm Max.**



- Support **IAP online upgrade**



- Support **QR CODE** printer

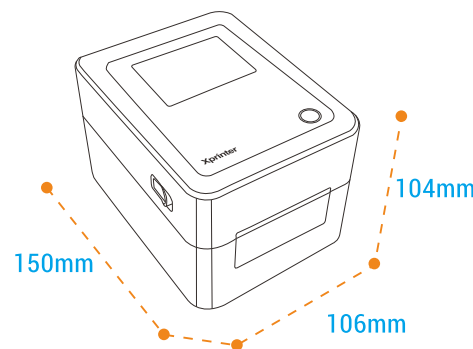

Model		XP-200B	
Print mode	Label print mode		Receipt print mode
Printing method	Direct Thermal		
Resolution	203 DPI	203 DPI	
Max.print speed	76 mm/s	100 mm/s	
Max.print width	48 mm		
RAM	576 KB		
Flash	64 KB		
Interfaces	USB, USB+Bluetooth(Optional: USB+WiFi, USB+Lan)		
Media			
Media type	Thermal roll paper, adhesive paper		Thermal Paper roll
Media width	20~60mm		58mm
Media roll diameter	80 mm		80mm
Paper taken method	Tearing off		Tearing off
Media thickness	0.06 ~ 0.19 mm		0.06 ~ 0.08 mm
Fonts/Graphics/Symbologies			
Barcode	UPC-A/UPC-E/JAN13(EAN13) /JAN8(EAN8)/CODE39/ITF/CODABAR/ CODE93/CODE128/QRCODE		UPC-A/UPC-E/JAN13(EAN13)/ JAN8(EAN8)/CODE39/ITF/CODABAR/ CODE93/CODE128/QRCODE
Character enlargement/rotation	Horizontally and vertically, it can be enlarged by 1-10 times, and rotated for printing (0 , 90 , 180, 270 degrees)		Horizontally and vertically, it can be enlarged by 1-8 times
Character	FONT 1 to FONT 8		Font A:1.5mm×3.0mm(12×24 dots) Font B:1.1mm×2.1mm(9×17 dots) Chinese:3.0mm×3.0mm(24×24 dots)
Emulation	TSPL		Compatible with ESC/POS
Physical Features			
Dimension	150*106*104mm		
Weight	0.74 kg		
Operation	5 ~ 45℃, Humidity: 10 ~ 80%		
Storage environment	-10 ~ 60℃, Humidity: 10 ~ 90%		
Power adaptor	AC 100-240V/50~60Hz, 1.0A		
Power Input	DC 9V / 2A		
Cash drawer	DC 12V / 1A		
Print head life	50 KM		
Operating system	WINDOWS/ Android / IOS		
Accessories (standard)	1. Wall type power cord 2. USB cable 3. Quick installation Guide 4. paper roll baffle 5. Receipt roll *1		



RMS Scotland Ltd
Unit 006, Ettrick Riverside
Dunsdale Road
Selkirk
TD7 5EB
www.rmpos.co.uk 0800 138 0050

