

Smart Desktop Terminal

SUNMI T3 Family - T3 New

Power meets elegance at your counter.

Powered by
SUNMI OS

Compatible with
SUNMI DMP



- **New platform to unleash powerful performance.**

Enjoy a 20% performance boost, with a Qualcomm octa-core processor offering a clock speed up to 2.4GHz and built with a 6nm process technology, along with 4GB RAM+64GB ROM of robust memory.

- **Sleek Z shape. Consistent excellence in design.**

The standout Z-shaped design offers elegance from every angle. A metal die-casting process provides a slim yet sturdy body. The hidden cable system keeps your workspace organized and clutter-free.

- **Enhanced user experience with new features.**

Triple displays provide versatile content presentation and seamless multi-screen integration. The NFC readers on two sides of the screen simplify membership management. The power button features fingerprint recognition for instant unlocking and secure app access.

**Elegant design,
consistent style.**



Powered by Qualcomm

**20%
Performance boost.**



*Data from SUNMI Lab.


**Triple the content you
want to display.**



**Use CPad PAY
as a secondary display.**



**Expanded interface
design.**

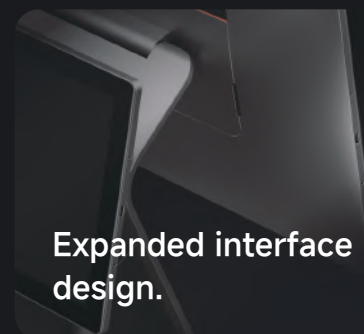

SUNMI T3 Application Scenario



Boutique Store



Bar Counter



Café

SUNMI T3 Tech Specs

CPU

Octa-core, up to 2.4GHz

OS

SUNMI OS 4.0
(Based on Android 13)

Memory

4GB RAM + 64GB ROM
Extended Micro SD Card
Slot Up to 2TB

Displays

15.6" FHD, 1920*1080 Pixels,
IPS
Capacitive Multi-touch Screen,
Anti-fingerprint Coating

GMS

Supported (Optional)

Buttons

1*Power button
1*Volume button (hidden)

Card Slots

1*Micro SIM (4G Version)
1*Micro SD

Interface

3*USB 2.0 Type-A
1*USB 3.0 Type-A
1*USB Type-C
2*Micro USB
1*Micro USB debug
1*RJ45
1*RJ11
1*RJ12
1*DC

Cellular

4G/3G (Optional)

Wi-Fi

5GHz/2.4GHz
IEEE 802.11 a/b/g/n/ac

Bluetooth

Bluetooth 5.0, Support BLE

Positioning

GPS/Glonass/Beidou/
Galileo (4G Version)

Cameras

5MP FF Front Camera

NFC

Tap on screen

Fingerprint

Supported

Audio

2*2W Speaker
1*Microphone

Sensors

Gravity sensor

Adapter

Input: 100~240V AC
Output: 24V/2.5A DC

Net Weight

3kg

Gross Weight

5.5kg

Environment

Operating Temperature:
0°C~40°C
Storage Temperature:
-20°C~60°C
Operating Humidity:
5% to 95% non-condensing

Accessories (Optional)

15.6" separate monitor: FHD 1920*1080, capacitive multitouch display
10.1" separate monitor: HD 1280*800, capacitive multitouch display
MSR Card Reader
Cash drawer mount
Elevated rubber feet

Dimensions(L*W*H)

373*176*314 mm

