

Smart Kiosk Terminal

# SUNMI K2 Retail Version\*

Modernize your customer self-service experience.



Floor-Standing/Wall-Mounted

Four Versions Available

Retail, Restaurant, Scalable and Extendable.

Elegant, yet Powerful

Built-in NFC capabilities of devices to provide a secure, flexible, and cost-effective solution for accepting contactless payments. NFC technology enables fast and efficient transactions, providing a seamless payment experience for customers.

Flagship Performance

High performance octa-core 6nm processor, up to 2.7Ghz. Equipped with large-capacity memory of 6GB RAM+128GB ROM.

Modular Design

The modular design offers K2 flexibility and scalability to be more industry-tailored. Modules for ID card reading and medical card reading, among other modules, can be added.

Bank Card Payment



Combine a SUNMI P series product with the kiosk to accept bank card payments.

\*POS terminal holders are customizable.

Please contact SUNMI sales reps for details.



\* 1. To explore more kiosks, please visit: [www.sunmi.com](http://www.sunmi.com)

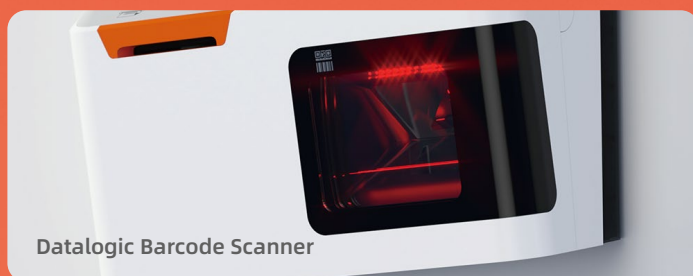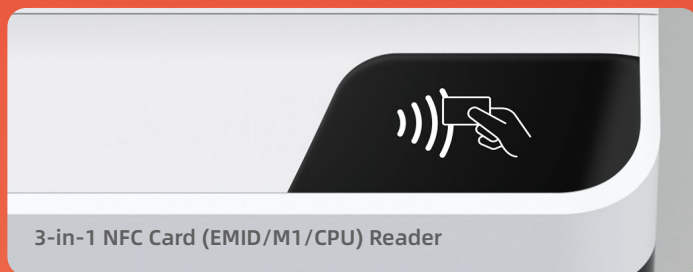

# SUNMI K2

## Basic Kiosk Specs

<b>Product Model</b> Config 1: F4E02 Config 2/3: F4E00	<b>OS</b> SUNMI OS Config 1: based on Android 13 Config 2: based on Android 9 Config 3: based on Android 7	<b>Processor</b> Config 1: Kyro-670 Qualcomm octa-core up to 2.7GHz Config 2/3: Hexa-core(Dual Cortex-A72+ Quad Cortex-A53) processor, 1.8GHz	<b>Memory</b> Config 1: 6G RAM+128G ROM Config 2: 4G RAM+32G ROM Config 3: 4G RAM+16G ROM	<b>Display</b> 23.8" FHD, 1920*1080 Capacitive multi-touch screen
<b>Camera (Optional)</b> 3D facial recognition camera	<b>Scanner</b> Support 1D/2D mobile and printed barcodes or support 1D/2D mobile barcodes	<b>Printer</b> Built-in 80-column thermal printer with auto cutter Print speed: 250mm/s; Paper roll:φ80mm Support 58mm width thermal paper(optional)	<b>PSAM Card Slot (Optional)</b> 1* PSAM	
<b>NFC Reader</b> Config 1: Support Mifare 1 card(S50,S70) and ISO 14443A CPU card Config 2/3: Support ID card, Mifare 1 card(S50,S70) and ISO 14443A CPU card	<b>Buttons</b> 1*Power on/off button (lock screen button)	<b>Bluetooth</b> Bluetooth 2.1/3.0/4.2 BLE	<b>Wi-Fi</b> Config 1: 2.4GHz/5GHz/6GHz IEEE 802.11 a/b/g/n/ac/ax Config 2/3: 2.4GHz/5GHz IEEE 802.11 a/b/g/n	<b>Power Adapter</b> Input: AC100~120V/AC200~240V Output: DC 12V/24V
<b>LAN</b> 100/1000M Self-adaptive	<b>External Memory</b> 1* MicroSD (TF), up to 128G	<b>Ports</b> 5*USB TypeA port, 1*Rj45 LAN port, 1*Audio Jack, 1*Micro USB debug port, 1*HDMI port	<b>Environment</b> Operating temp.: 0 ~ 40°C; Storage temp.: -20°C ~ 55°C	
<b>Speaker</b> 2*3W	<b>MIC</b> 1* MIC	<b>Indicator Light</b> 7 colors	<b>Accessories</b> NFC, POS bracket, shopping bag hanger	

## Item Dimensions & Weights

Main unit: Dimensions: 394mm wide x 171mm deep x 920mm high; Net weight: 16.5kg

<b>Retail (58kg)</b>  Height: 1850mm Depth: 645mm Width: 1018mm	<b>Restaurant (45kg)</b>  Height: 1850mm Depth: 490mm Width: 540mm	<b>Scalable (50kg)</b>  Height: 1810mm Depth: 490mm Width: 540mm	<b>Wall-Mounted (16.5kg)</b>  Height: 1017mm Depth: 171mm Width: 394mm
--	---	--	---

## Shipping Dimensions & Weights

<b>Retail</b> Gross weight (package incl.): 77kg Main unit package (WxDxH): 1110mm x 523mm x 371mm, weight: 21.5kg Pedestal package (WxDxH): 1110mm x 523mm x 250mm, weight: 17kg Table package (WxDxH): 1110mm x 523mm x 305mm, weight: 18kg Base plate package (WxDxH): 666mm x 510mm x 40mm, weight: 20.5kg	<b>Restaurant</b> Gross weight (package incl.): 55kg Main unit package (WxDxH): 1110mm x 523mm x 371mm, weight: 21.5kg Pedestal package (WxDxH): 968mm x 495mm x 250mm, weight: 16.5kg Base plate package (WxDxH): 556mm x 510mm x 40mm, weight: 17kg
<b>Scalable</b> Gross weight (package incl.): 59kg Main unit package (WxDxH): 1110mm x 523mm x 371mm, weight: 21.5kg Pedestal package (WxDxH): 968mm x 495mm x 266mm, weight: 19.5kg Base plate package (WxDxH): 556mm x 510mm x 40mm, weight: 17kg	<b>Wall-Mounted</b> Gross weight (package incl.): 24kg Main unit package (WxDxH): 1110mm x 523mm x 371mm, weight: 21.5kg Mount package (WxDxH): 366mm x 315mm x 37mm, weight: 2.5kg (the mount is packed in the main unit package for shipping)